

26" Dia. x 38" H Size:

Weight: 580 Lbs.

Capacity: 53 gallon capacity

Material: Reinforced concrete

Reinforcing: 1/4" Dia. steel rebar

Parts: 1- metal grate

Finish Options

Standard Finish Options:

Weatherstone:

Gray(B1)

French Gray(B2)

Sand(B3)

Buff(B4)

Cream(B5)

Brown(B6)

Brick Red(B7)

Charcoal(B8)

Soulard Green(B9)

Exposed Aggregate:

Tan Exposed(A1)

Misty Exposed(A2)

Sand Exposed(A3)

Brown Exposed(A4)

Wyoming White Exposed(A5)

Brick Red Exposed(A6)

Premium Finish Options:

CEAPOSEU C	or Weatherst	one)	Granitex:
ass	Matrix		GTX2078F
rcoal	Charcoal		GTX4028F
rcoal	Gray		GTX6208F
rcoal	Sand		GTX1168F
rcoal	White		GTX2098F
npaign	Charcoal		
npaign	Gray		
npaign	Sand		
npaign	White		
nber	Charcoal		
nber	Gray		
nber	Sand		
nber	White		
ue	Charcoal		
ue	Gray		
ue	Sand		
erald	Charcoal		
erald	Gray		
erald	Sand		
erald	White		
ear	Gray		
ear	Sand		
	rcoal rcoal rcoal rcoal rcoal rcoal rpaign rpaign rpaign rpaign rpaign repaign	Matrix Coal Charcoal Coal Gray Coal Sand Coal White Charcoal Charc	Matrix Coal Charcoal Coal Gray Coal Sand Coal White Coal White Charcoal

White

Custom Options Available

Clear

C69



Specification TF1131

1.1 SUMMARY

 Section includes: Furnish Precast Concrete indicated on drawing or specified herein.

1.2 REFERENCES

A. American Society for Testing & Material

1. ASTM C33 2. ASTM C150 3.ASTM C31

1.5 SUBMITTALS

A. Submit Product data, shop drawings and samples.

- Product Data: Manufacturer's specifications and technical data edited specifically for proposed system, including the following specific Information:
 - a: Detailed specification of construction fabrication.
 - b: Manufacture's installation instructions
 - c: Maintenance literature
 - d: Product warranty
- Shop Drawings: Indicate pertinent dimensions, general construction, component connections anchoring methods, hardware and installation procedures.
- 3. Samples as requested by Architect.

1.6 QUALITY ASSURANCE

A. Qualifications of Manufacture: Manufacturer to be prequalified by specifier prior to bidding. Failure to comply will result in disqualification of bid. Manufacturer to have at least five years experience in the manufacture of precast concrete bollards field proven for at least five years.

1.10 WARRANTY

Manufacturer shall submit a written warranty for precast products for the period of two years upon acceptance.

2.1 MANUFACTURERS

 A. Acceptable manufacturer for Precast Concrete Waste Containers to be know as Wausau Tile, Inc.

P.O. Box 1520


Wausau, WI 54402-1520

(800) 388-8728 (715) 359-3121 FAX (715) 355-4627

- B. Clarification Note: Drawings and installation specification are based on manufactures proprietary literature from Wausau Tile, Inc. other manufacturers shall comply with minimum levels of material and detailing indicated on drawings of specified herein.
- C. All Precast products for this project shall be of one manufacturer.

2.2 MATERIALS

- A. Portland Cement: ASTM C150 specifications for Portland Cement.
- B. Aggregates: All aggregates to meet ASTM C33 specifications, to be cleaned of foreign matter and properly graded to size.
- C. Coloring: Pigments used shall be inorganic, resistant to alkalinity and used as per manufacturers recommendations.

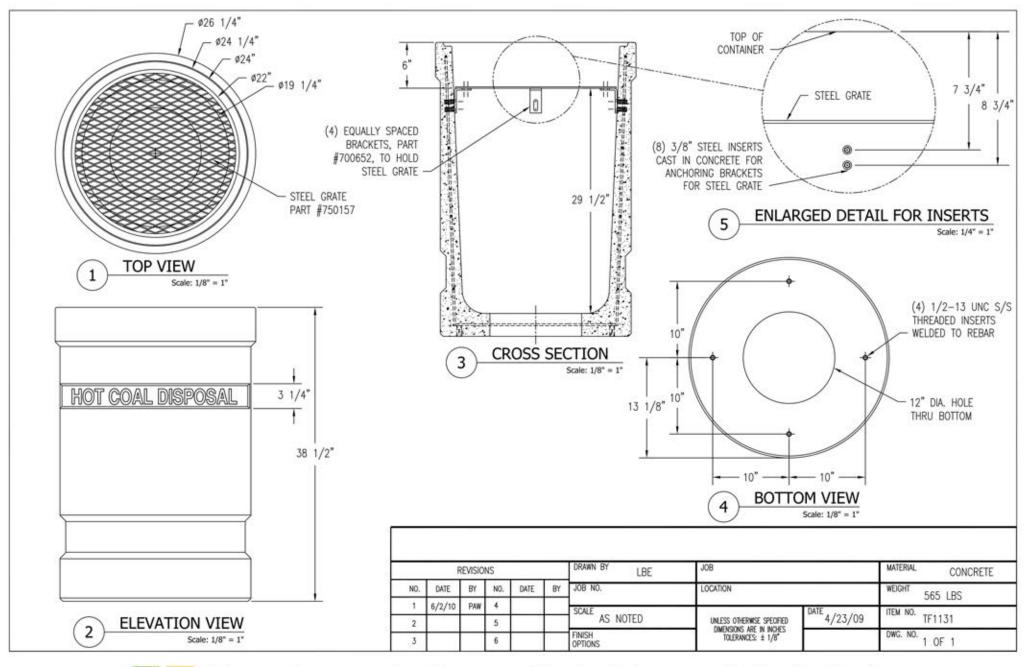



FurnitureLeisure.com PoolFurnitureSupply.com
PicnicFurniture.com PicnicTableSupplier.com
UBrace.com
1-800-213-2401 | sales@furnitureleisure.com