


3/20/2019 Page 1 of 7

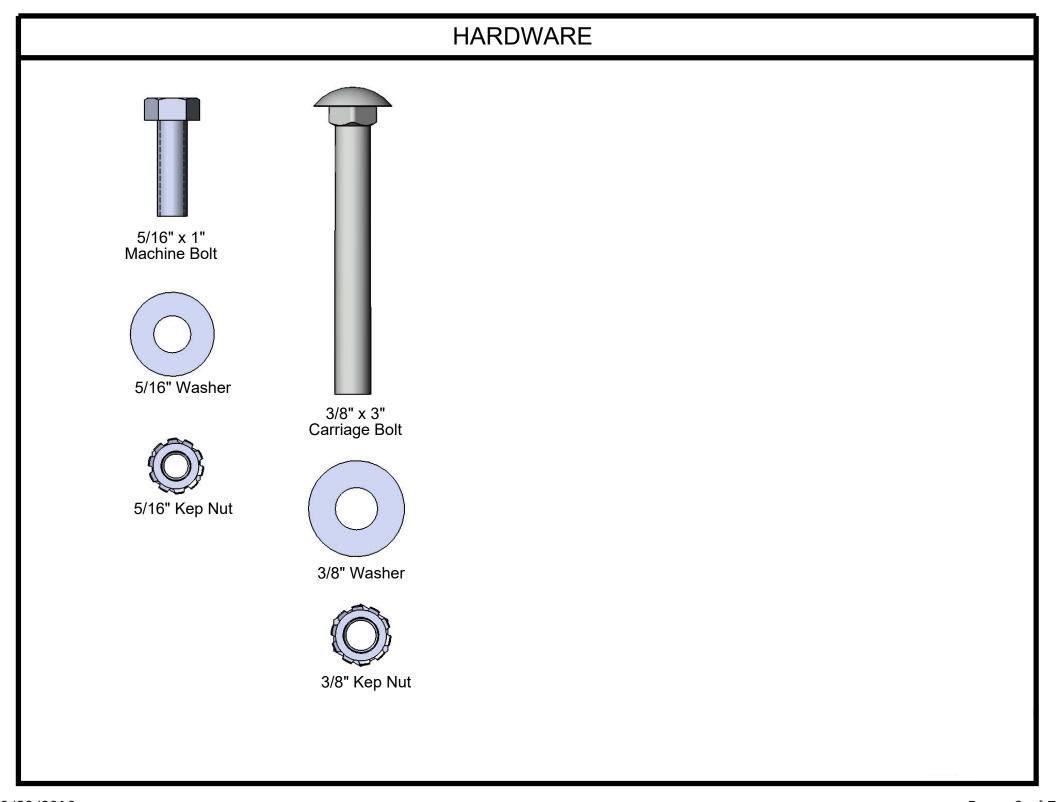

3/20/2019 Page 2 of 7

PRODUCT SPECIFICATIONS

B6WBPERFP PORTABLE BENCH WITH BACK

Seats & Back: Seats shall have a 1 ½" radius edge, fabricated from a 14 ga. plate. Holes are precision punched at 5/8" diameter. 7 gauge x 1-1/2" flat bar center support and mounting bracket understructure. Electrically MIG welded.

Coating: Oven fused functionalized polyethylene copolymer-based thermoplastic. Fluidized bed coating application with superior mechanical performance, impact resistance and UV-stability.

Frame: 2-3/8" O.D. x 12 gauge pre-galvanized structural steel tubing. Seat/back support is bent over a mandrel through the bend radius producing a wrinkle free bend. Tube ends are pre-galvanized steel capped. Seat mounting points are 7 gauge x 1-1/2" die stamped steel flat bar. Cross braces are 1" O.D. x 16 gauge pre-galvanized structural steel tubing. All electrically MIG welded.

Frame Coating: Electrostatic powder coated application oven cured.


Hardware: All stainless steel hardware fasteners.

Dimensions: 6' bench portable with back. Seats and back are 12" wide x 72" long. Seat height is 18-1/2", seat back height is 35". Total depth of seat with back is 22-1/4".



3/20/2019 Page 3 of 7


COMPONENTS

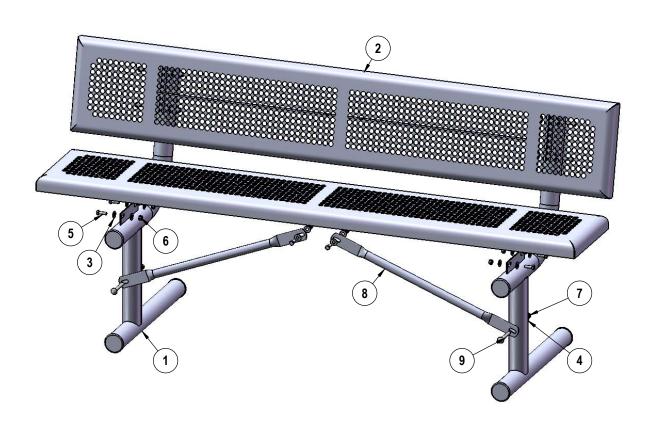

ITEM NO.	PartNo	DESCRIPTION	QTY
1	P-V940P	940P Vinyl Leg	2
2	T-PR72-S	6' Punched Rolled Seat	2
3	33-02-0007	5/16" SS Washer	20
4	33-02-0008	3/8" Flat Washer (SS)	2
5	33-05-0029	5/16" x 1" Machine Bolt (SS)	10
6	33-03-0012	5/16" Kep Nut (SS)	10
7	33-03-0013	3/8" Kep Nut (SS)	2
8	P-01-04-0129	26 3/4" Brace	2
9	33-06-0058	3/8" x 3" Carriage Bolt (SS)	2

3/20/2019 Page 4 of 7

STEP 1

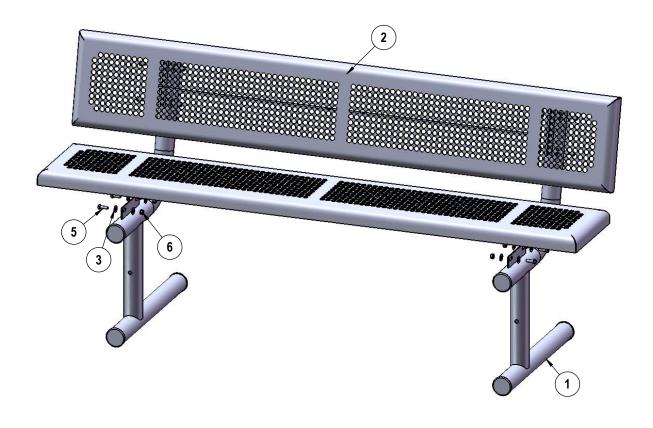

Attach the Seats to the Legs as shown using specified hardware.

3/20/2019 Page 5 of 7

STEP 2



Attach the 26-3/4" Braces to the Seat and Legs as shown using specified hardware.

3/20/2019 Page 6 of 7

OVERALL DIMENSIONS - 72" -- 22 5/16" <u>35 1/16"</u> 18 3/8"

3/20/2019 Page 7 of 7